

### Overview (T-shape = standard)

**open** **closed**

**a** - platform  
**b** - side/door  
**c** - canopy  
**d** - adj. leg  
**e** - gasspring  
**f** - U-profile  
**g** - canopy catch

**Wheight/tare:** ap. 1100-2000Kg  
**electricity:**  
indoors: via Schuko connector in floor flap, 230 V, 16 A  
main connector/remote control for lifting devices:  
see this **symbol** on horizontal steel section, pull from underside of frame, connector rests in alu box

**indoors**

**symbol**

**! see manual for warnings!**

### dimensions

**modulbox open**

**front** 2280 mm, 1888 mm (Plattform), 2280 mm, 2235 mm, 367 mm, 2786 mm

**left** 1814 mm, 2000 mm (Innenraum), 2280 mm, 2300 mm (bis Lichtlecke)

**modulbox closed**

**front** 2785 mm

**left** 2785 mm

**top** 2538 mm, 2084 mm

**top** 2429 mm, 2429 mm

### TRANSPORT & LOADING (if equipped with lifting devices)

**1** **2** **3** **4**

**modulbox needs exact position on trailer!**

**use tension belts for fixing!**

**! see manual for loading instructions !**

### variations

2,45 m, 2,45 m, 5 m, 7,50 m, 7,50 m, 7,50 m, 7,50 m

2,45 m, 5 m, 5 m, 7,50 m, 7,50 m


**standard**

2,80 m, 2,80 m, 2,80 m, 2,80 m, 2,80 m

HANDLING


opening modulibox®

1 MODULBOX closed





a - opening / closing the canopy catches

2 CANOPIES opening / closing

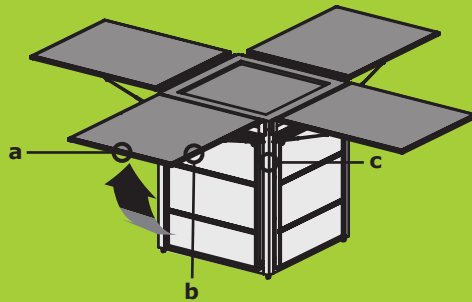


a - opening / closing the canopy  
b - canopy fixing (using the U-profile)  
c - fixing the U-profile with locking pin

3 PLATFORMS opening / closing

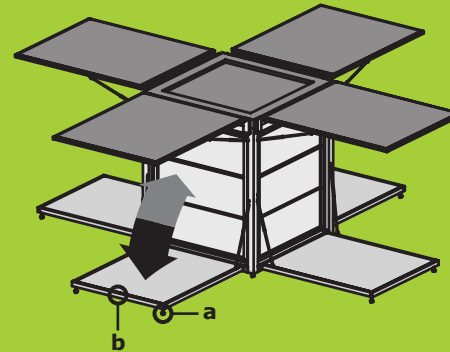

a1 - opening locking pin  
a2 - swing out/in adjustable leg  
b - opening / closing platform

4 DOORS opening / closing

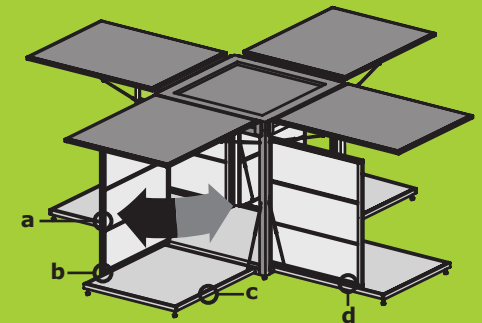

a - opening / closing door  
b - watch for enough clearance  
c - unscrew door lock angle  
d - door lock angle fixing/unfixing

closing modulibox®